

Model #

12C-MPWP-56-7-5K-T3

Silver Series Wall Pack Type 3



TITAN LED LIGHTING SOLUTIONS

# 40 Watt Type III Wall Pack


HAND CRAFTED IN AMERICA

## Specifications - Light Output

Total Lumen Output:  
INITIAL: 5,568 lm  
DELIVERED: 5,141 lm  
Kelvin: 5000K  
Max. Candela: 3,328 lm  
CRI: 82  
Light Output Angle: Type 3 Clear

## Specifications - Electrical

Dimming:	0-10V Low Voltage
Voltage Range:	120 - 277V
Max. Ambient Temp:	-4° to 139°F / -20 to 59°C
Efficacy INITIAL	161.1 lm/W
<b>Voltage</b>	<b>120 V</b>
Frequency	60.0 Hz
Current	.336 A
Power	39.9 W
Drive Current	700 mA
Power Factor	.99
Efficacy DELIVERED	128.8 lm/W
THD	6.6 %
<b>Voltage</b>	<b>277 V</b>
Frequency	60.0 Hz
Current	0.154 A
Power	38.0 W
Drive Current	700 mA
Power Factor	.89
Efficacy DELIVERED	135.2 lm/W
THD	8.4 %

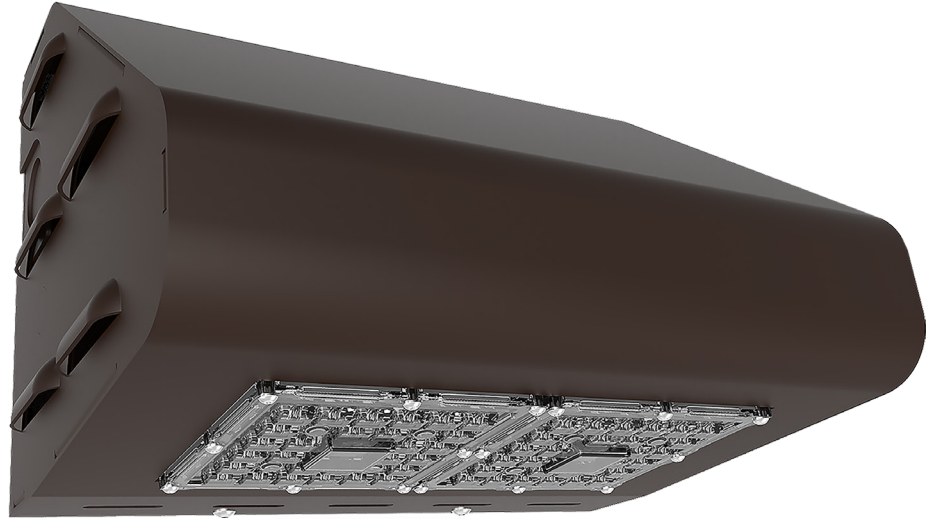


## Specifications - Mechanical

LED Count: 56 Mid Power  
Lumileds LUXEON Top Tier LEDs  
Dimensions: 11.5" L x 7.5" W x 8.1" H  
Net Weight: 5.4 lbs / 2.4 kg  
Rugged 18 Gauge Aluminum Housing  
Durable Powder Coated Finish  
Optional Colors with a Minimum Order Requirement  
Polycarbonate Flame Retardant Lensing  
Proprietary Type III Optics  
Solid Core Circuit Boards  
Stainless Steel Hardware  
Mounting: J-Box Universal Alignment Rear Slots for Secure Wall Mounting  
Side Panel 3/4" Knockouts on both sides

## Options:

# 50-SENSOR-PC (120 - 277V) (Photo Cell)  
# 50-MSOD-SENSOR (Hybrid)

## Dimensions:

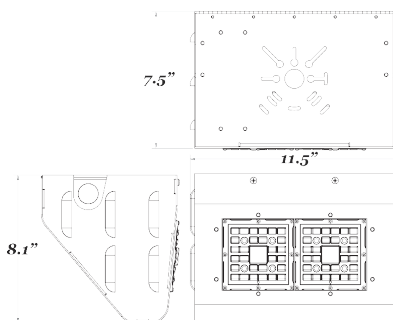

Universal Slotted Rear Panel Shown



# 100,000 RATED HOURS



## Increased Safety

- Ideal for illuminating Outdoor Walls on Warehouses, Manufacturing area's, Garages,
- Simple and Secure Installation with Rear Wall Mount J-Box Universal Slots
- Improved Bright White Color and Increased Light Levels Improve Safety

## Improved Maintainability

- Industry Leading Low LED Junction Temperature
- Lowers Cost of Ownership - Pays Back Purchase Amount with Energy Savings
- Vibration and Shock Resistant
- Decorative Heavy Gauge Aluminum Housing With Hinged Driver Access
- Environmentally Friendly, No Toxic Gasses, Chemical Free, Over 95% Recyclable
- Typically Reduces Energy Consumption 60 - 70% Over Metal Halide Lighting
- Noise Free, Instant On - Off Operation, No Flickering, No Warm Up Time
- Lumileds Luxeon Tier One Diodes
- L-70 Rated at Over 100,000 Hours with DOE TM-21 Calculator
- Quickly Go Green and Greatly Reduce a Companies Carbon Footprint

## Optional Control

- Hybrid Sensor- Photo Cell / Motion Option for Title-24 Compliance Certification