

Model #

12C-MPWP-56-5-5K-T3

Silver Series T3 Wall Pack



TITAN LED
LIGHTING SOLUTIONS

28 Watt Type III Wall Pack

HAND CRAFTED IN AMERICA



Specifications - Light Output

Total Lumen Output:
INITIAL: 4,348 lm
DELIVERED: 3,999 lm
Kelvin: 5000K
Max. Candela: 2,612 lm
CRI: 82
Light Output Angle: Type 3 Clear
BUG rating: B1-U1-G1

Specifications - Electrical

Voltage Range: 120 - 277V
Max. Ambient Temperature -4° to 139°F / -20 to 59°C
Efficacy INITIAL 168 lm/W
Voltage 120 V
Frequency 60.0 Hz
Current .242 A
Power 28.6 W
Drive Current 550mA
Power Factor .98
Efficacy DELIVERED 139.8 lm/W
THD 13 %
Voltage 277 V
Frequency 60.0 Hz
Current 0.119 A
Power 29.0 W
Drive Current 550mA
Power Factor .88
Efficacy DELIVERED 137.8 lm/W
THD 12 %



Specifications - Mechanical

LED Count: 56 LUXEON Top Tier LED Diodes
Dimensions: 11.5" L x 8.1" D x 7.5" H
Net Weight: 5.4 lbs / 2.4 kg
Rugged 14 Gauge Aluminum Housing
Durable Powder Coated Finish
Optional Colors with a Minimum Order Requirement
Polycarbonate Flame Retardant Lensing
Proprietary Type III Optics
Solid Core Circuit Boards
Stainless Steel Hardware
Mounting: J-Box Universal Alignment Rear Slots for Secure Wall Mounting
3/4" Knockouts on both sides
Replaces up to 100 watt HPS or Metal Halide

Options:

50-SENSOR-PC (120 - 277V) (Photo Cell)
50-MSOD-SENSOR (Hybrid)

Dimensions:

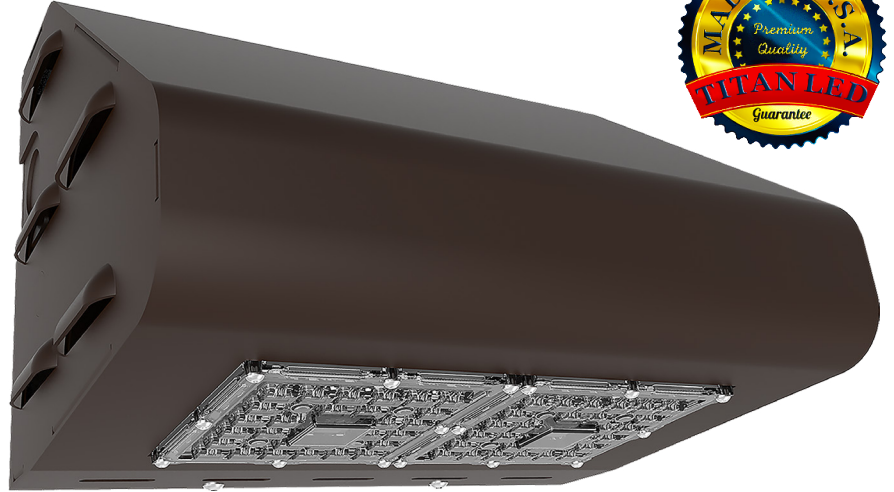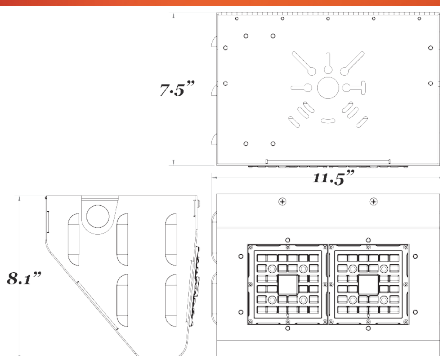

Universal Slotted Rear Panel Shown



100,000
RATED HOURS



Increased Safety

- Ideal for illuminating Outdoor Walls on Warehouses, School area's, Garages, Etc.
- Simple and Secure Installation with Rear Wall Mount J-Box Universal Slots
- Improved Bright White Color and Increased Light Levels Deter Crime, Improve Safety

Improved Maintainability

- Industry Leading Low LED INSITU Junction Temperature
- Lowers Cost of Ownership - Pays Back Purchase Amount with Energy Savings
- Vibration and Shock Resistant
- Decorative Heavy Gauge Aluminum Housing With Hinged Driver Access
- Environmentally Friendly, No Toxic Gasses, Chemical Free, Over 95% Recyclable
- Typically Reduces Energy Consumption 60 - 70% Over Metal Halide Lighting
- Noise Free, Instant On - Off Operation, No Flickering, No Warm Up Time
- Lumileds Luxeon Tier One Diodes
- L-70 Rated at Over 100,000 Hours with DOE TM-21 Calculator
- Quickly Go Green and Greatly Reduce a Companies Carbon Footprint

Optional Control

- Hybrid Sensor- Photo Cell / Motion Option for Title-24 Compliance Certification